


# Sistemas de alta seguridad pasiva

## CONCERTINA 25



### 1. MEDIDAS

Grosor	Ø Alambre	Largo cuchilla	Ancho cuchilla	Espacio entre cuchillas
0,5 mm	2,5 mm	25 mm	16 mm	43 mm

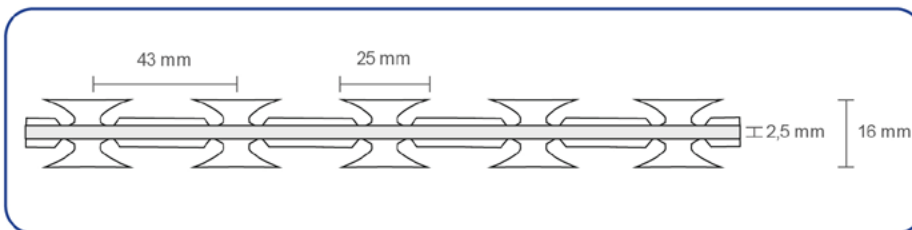

Alambre Galvanizado  
de alta tensión  
Ø 2,5 mm



### 2. CARACTERISTICAS TECNICAS

Díametro (mm)	Nº Clips	Metros lineales (m)
8 - 11	3	450
9 - 12	3	500
9 - 12	3	570
9 - 12	3	600
9 - 12	3	630
9 - 12 / 13 - 16	5 / 3	700
9 - 12 / 13 - 16	5 / 3	730
9 - 12 / 13 - 16	5 / 3	815
11 - 14	5	975
11 - 14	5	980
12 - 15	7	1250
12 - 15	9	1500


### 3. MATERIAL

#### ● Acero inoxidable

EN 1.4016 - AISI 430  
EN 1.4301 - AISI 304  
EN 1.4401 - AISI 316

#### ● Acero galvanizado

Z 230 - Z 275 (G75 - G90)



#### EUROPEAN SECURITY FENCING

Camino de Juan Chaves s/n  
29580 Est, Cartama, Málaga - España  
Tlf 952 42 70 70 - info@europeansf.com

[www.europeansf.com](http://www.europeansf.com)




# Sistemas de alta seguridad pasiva


## CONCERTINA 25




### 3. COMBINACIONES

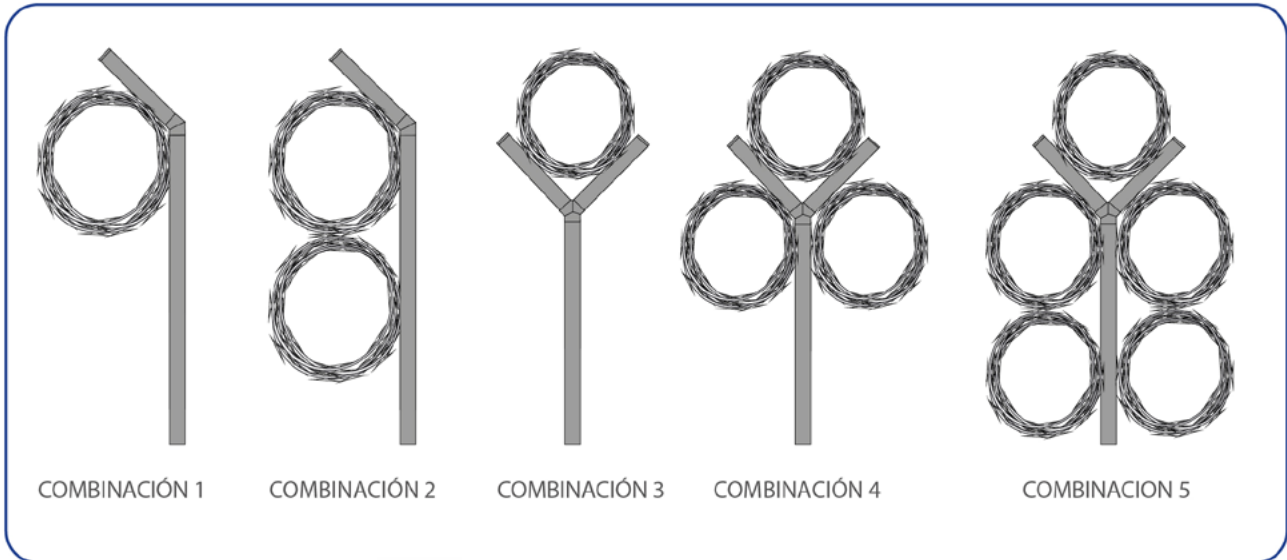

### 4. LUGARES DE APLICACIÓN

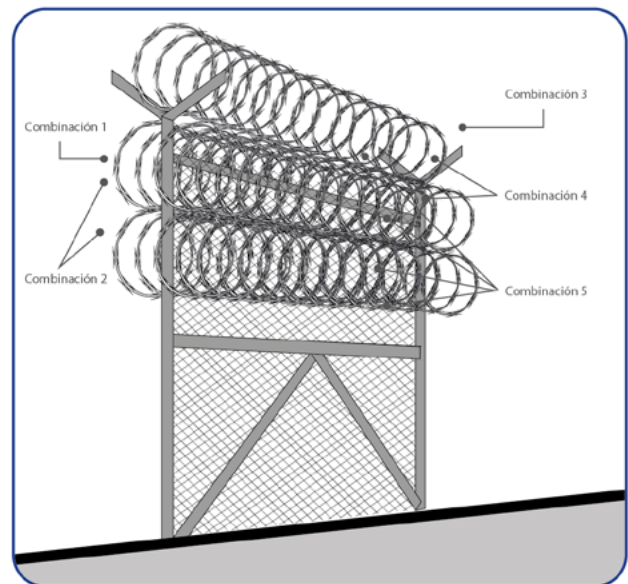

Montaje de concertinas sobre malla metálica

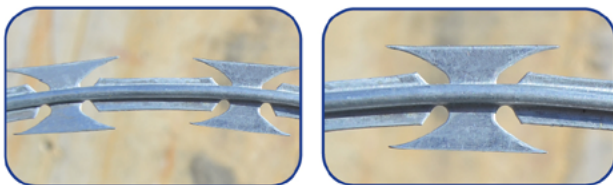

#### EUROPEAN SECURITY FENCING

Camino de Juan Chaves s/n  
29580 Est, Cartama, Málaga - España  
Tlf 952 42 70 70 - info@europeansf.com  
[www.europeansf.com](http://www.europeansf.com)

